




Model 150-05

Automatic Riveting Machines


Twin head riveting machines 150-05 und 150-06
Triple head riveting machines 150-25 und 150-26

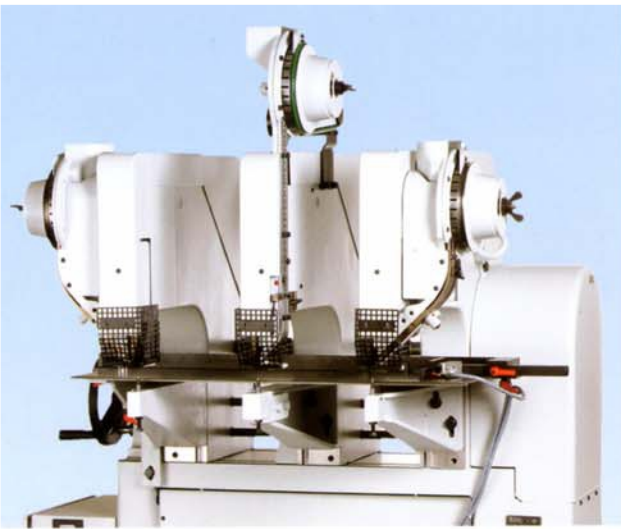

Model 150-25


Automatic twin head riveting machines 150-05 / 150-06. Automatic triple head riveting machines 150-25 / 150-26.

- For riveting mechanisms to ring binders and file systems.
- With brake motor drive.
- Rivet feeds are set up for **one** rivet shaft diameter (with variable rivet shaft length and rivet head diameter tolerance of 2 mm).
- Individual riveting possible by deactivating left (and centre) riveting head.
- Adjustment of rivet distance by means of a hand wheel.
- Rapid and precise setup by means of integrated scales in bench and easily adjustable stops.
- Release by means of electrical foot switch and/or three micro switches in rear and side stops, allowing rapid and precise positioning.
- Optional: diagonal tool with stops **for fixing lever arch mechanisms.**
- Optional: finger protection device.
- Optional: dual palm button safety release.

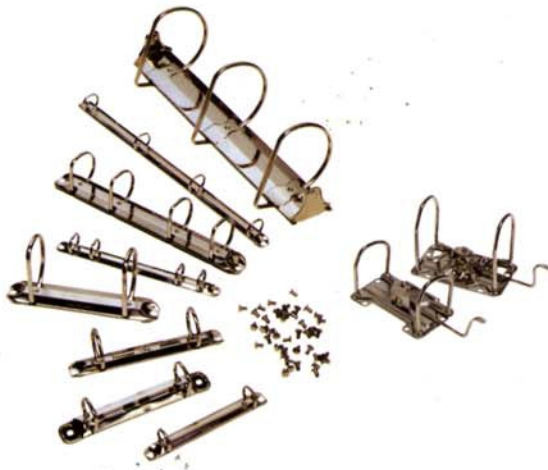


Rivet distance for models 150-25/ 150-26:

Version I:



Version II:



CE Subject to technical alterations.

Automatic insertion machines for eyelets, rivets, press-buttons, insert nuts, threaded pins, etc. (eyelets, rivets can be obtained from us).

High-grade riveting systems for file systems.

Paper drilling machines, paper drills.

Automatic twin head riveting machines 150-05 / 150-06.

Technical data:	150-05	150-06
Rivet distance: adjustment range:	35 - 440 mm	35 - 440 mm
Distance:		
With release by means of foot switch:	370 mm	600 mm
With release by means of micro switch:		540 mm
- with standard stop:	310 mm	-
- with special stop:	360 mm	-
Working height:	1080 mm	1080 mm
Dimensions:		
Width:	1160 mm	1160 mm
Depth:	800 mm	1050 mm
Height:	1600 mm	1600 mm
Weight: net	460 kg	510 kg
Speed:	0.5 sec.	0.5 sec.

Automatic triple head riveting machines 150-25 / 150-26.

Technical data:	150-25	150-26
Rivet distance: adjustment range:		
Distance:		
With release by means of foot switch:	370 mm	600 mm
With release by means of micro switch:		540 mm
- with standard stop:	310 mm	-
- with special stop:	360 mm	-
Working height:	1080 mm	1080 mm
Dimensions:		
Width:	1160 mm	1160 mm
Depth:	800 mm	1050 mm
Height:	1600 mm	1600 mm
Weight: net	550 kg	625 kg
Speed:	0.5 sec.	0.5 sec.

hang ○ ○ ●

Perfection. Competence. Requirement.

www.hang-us.com

The exclusive agent in North America:

DFP
Print Finishing Partners